




FLYING TRAPEZE PROJECT OVERVIEW



INSTALLATION CONSIDERATION


STRUCTURAL ANCHORS

24 Anchors needed to be set before installation starts. Stainless steel anchors sold from MACA will be sent in advance of the Trapeze Rig and full instructions are given for concrete requirements.

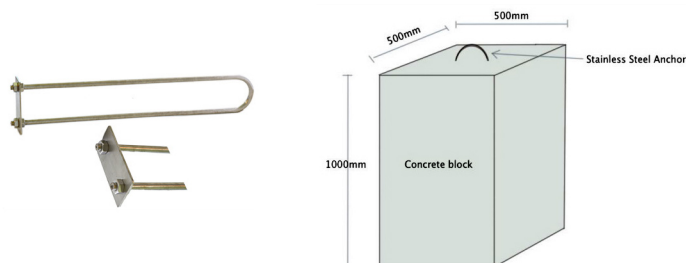

POLE PLACEMENT BASES

The main Trapeze Rig poles and net poles require 14 concrete bases. These bases need to be 40cm x 40cm x 10cm and need to be supplied by the client. Wooden bases are also required for the poles to sit on. These wooden bases need to be 20cm x 20cm x 2cm and are to be supplied by client due to strict importation laws regarding most wood.

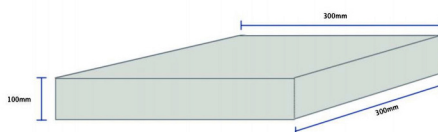


*Dimensions required may vary depending on site's foundation



AREA REQUIRED

Clear and flat piece of land 25 meters x 35 metres

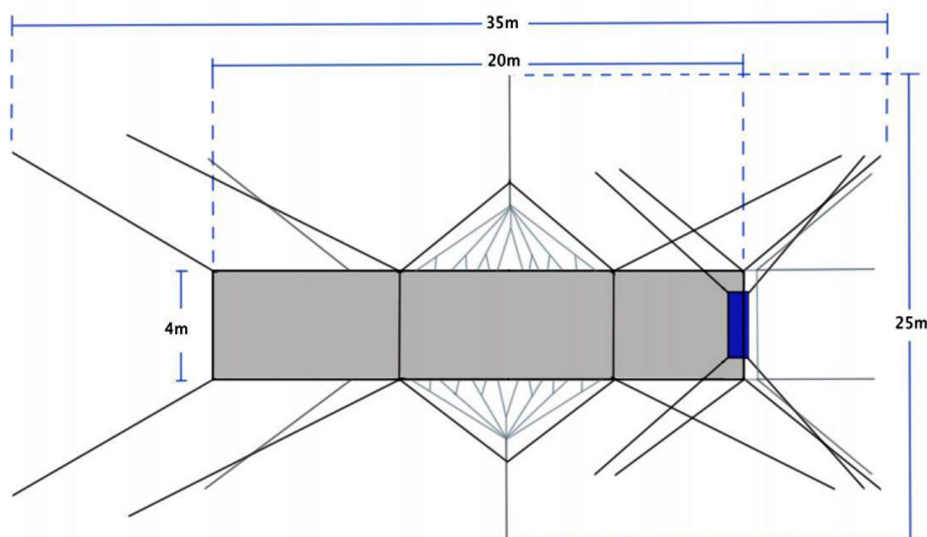

OTHER CONSIDERATIONS

- ✓ Shaded waiting area for participants
- ✓ Floodlighting for night operation or shows
- ✓ Seating for participants as well as spectators



PROJECT COSTINGS



FLYING TRAPEZE RIG

All frames, connections, net bars & safety lines etc for immediate operation of Flying Trapeze.

Includes:

- Heavy Duty Machine Woven & UV Treated Net (Superior Durability)
- Double Wide Pedestal Board (Superior Safety & Comfort)

USD\$32,500

ANCHORS

24 Solid stainless steel structural anchors for standard trapeze rig. Concrete required from client..

USD\$2,220



FULL STOCK PACKAGE (Recommended)


Consumable supply stock of chalk & tape, maintenance tools, a full set of 10 safety belts, back up fly cables and safety lines, critical components back up stock, chalk sack, spare fall arrester, back up dyneena extension cable with running pulleys, minimum stock level, mount board for stock management.

USD\$9,910

SAFETY MAT PACKAGE (Recommended)

Two high quality supersoft safety mats for Trapeze rollout and practice bar area. 1830mm x 1830mm x 300mm. Supersoft Foam Interior, Heavy duty triple stitched handles.

USD\$2,240

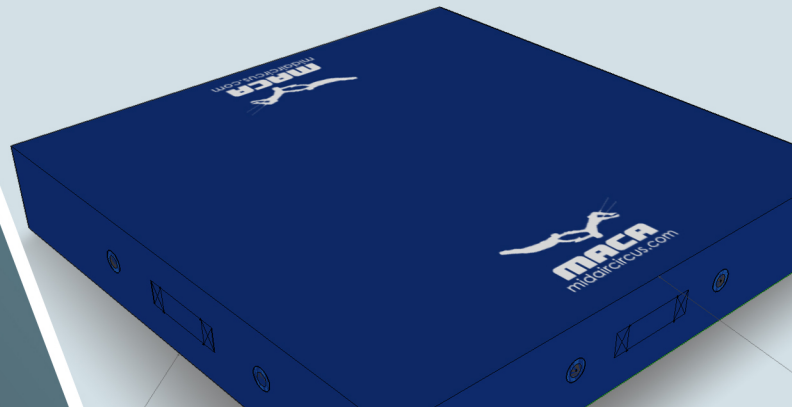

PRICES DO NOT INCLUDE

- ▶ Shipping/Handling of components
- ▶ Any applicable taxes, duties or customs



INSTALLATION - TRAINING MAINTENANCE COSTINGS



USD\$2,800*

INSTALLATION SET UP/TESTING

Estimate of 4 days for set up and full testing of rigging.

2 person MACA team required plus occasional assistance from 2-3 local staff for elements of setup.

N.B. Additional cost of Local staff to be borne by client

* 4 Day Schedule Weather Permitting



USD\$400/DAY

OPERATION STAFF TRAININGS

Establish Standard Operating Procedures (SOPs) and safety protocols. Quickly reach full integration and working capacity of local staff. Help build team unity and Trapeze culture that is essential for the successful operation of the activity.

Estimate Training Time 10 Days*

*with Activity Manager in place & team size minimum of 3 people



USD\$500/DAY

MAINTENANCE SAFETY CHECKS

Recommended yearly depending on frequentation and environmental conditions. Full safety inspection and repair/replacement of any worn elements.

Please note that inspections are required for validity of warranty.

Certificate of Inspection issued for public display.

5 Years Maintenance Contract Standard Inspection Daily Rate

Routine inspections 2 Days plus travel time.



PRICES DO NOT INCLUDE

- ▶ Return Flights & Visas
- ▶ Accommodation, Transfers & Meals to be provided

